


Totally Enclosed - Single Shaft

Sleeve Bearing - Shaded Pole & P.S.C.

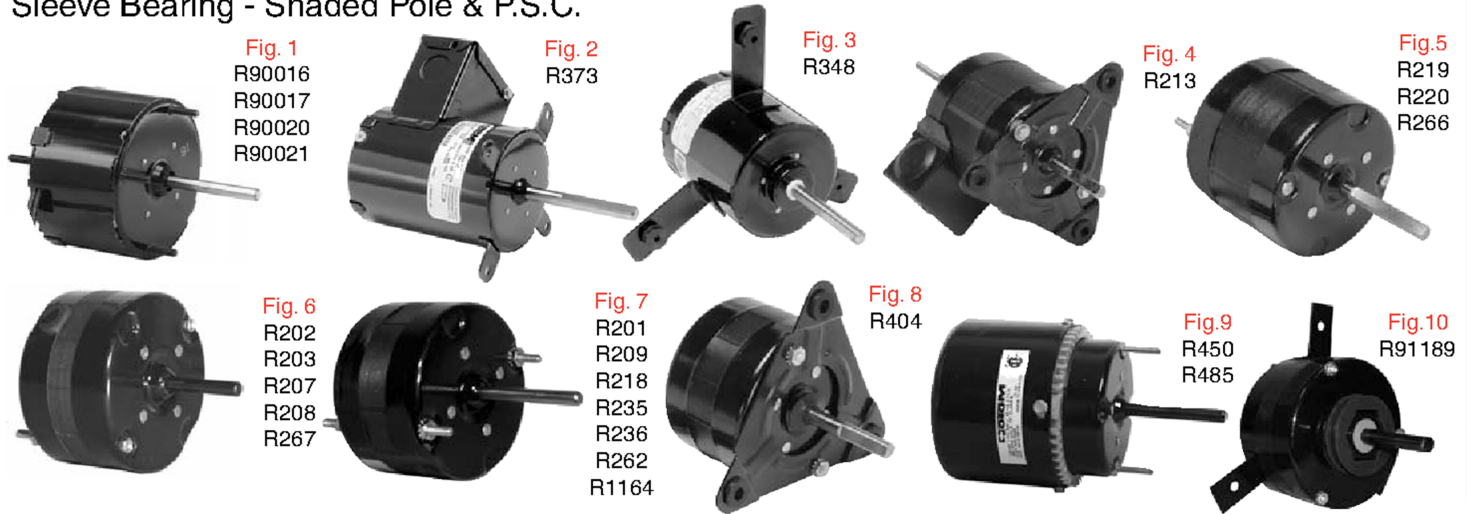

Motors

1550 RPM-115, 208, 230 Volt

3.3" Motors continued from previous page

Part #	Amps	Volts	HP	Rot	Shaft	Body	Features	Comment	Fig.
R90021	0.80	115	1/50	CW	2.24"x1/4"	2.44	4 studs front & rear	21, D125, 40125, 3M661	1
R90020	0.80	115	1/50	CCW	2.24"x1/4"	2.44	4 studs front & rear	20, D124, 40124, 3M554	1
R90017	0.60	115	1/80	CW	2.24"x1/4"	2.14	4 studs front & rear	17, D123, 40123	1
R90016	0.60	115	1/80	CCW	2.24"x1/4"	2.14	4 studs front & rear	16, D122, 40122	1
R207	0.80	115	1/70	C.W.	1.5"x1/4"	2.00	Cord & plug	Nutone	6
R203	0.80	115	1/70	C.C.W.	1.5"x1/4"	2.10	Cord & plug	Threaded shaft	6
R267	0.80	115	1/50	C.W.	1.5"x5/16"	2.25	Cord & plug	Reversomatic	6
R201	0.85	115	1/50	C.W.	2.3"x1/4"	2.20	1430 RPM	Camco/Nutone	7
R404	0.85	115	1/50	C.C.W.	1.8"x5/16"	2.48	Triangular Brk.	Clawsey Sohrt	8
R209	0.87	115	1/45	C.W.	1.5"x5/16"	2.30	Cord & plug	Nutone/Broan	7
R235	0.90	115	1/80	C.C.W.	1/4"x1.1"	2.35	C-ring groove, 1050 RPM	W.C.Woods	7
R373	0.90	115	1/15	C.C.W.	3.3"x3/8"	4.50	PSC/Cap. inc., 1400 RPM	Dayton greenhouse motor	2
R236	1.00	115	1/50	C.C.W.	1.1"x1/4"	2.25	C ring groove, Two speed, 1575 RPM	W.C.Woods	7
R218	1.00	115	1/40	C.C.W.	1.9"x1/4"	2.60	18" Leads	Gen. Replacement	7
R202	1.00	115	1/40	C.W.	1.3"x1/4"	2.50	Two speed plug	Nutone	6
R208	1.00	115	1/40	C.W.	1.9"x1/4"	2.60	2 studs front & rear	Gen. Replacement	6
R262	1.00	115	1/40	C.W.	1.5"x5/16"	2.40	Cord & plug	Reversomatic	7
R348	1.12	115	1/15	C.C.W.	3.4"x3/8"	4.10	PSC/inc., 3 ears, two speed	Vanee HRV M1703	3
R485	1.27	230	1/15	C.W.	2.0"x5/16"	4.50	Mechanical Duty, 1280 RPM, two speed	Gen. Replacement	9
R1164	1.30	115/230	1/25	C.C.W.	2.4"x5/16"	2.75	4 studs front & rear	431, 432, D1164, 2868-513-419	7
R450	1.35	115	1/25	C.C.W.	2.5"x5/16"	4.25	Mechanical Duty	Gen. Replacement	9
R213	1.40	115	1/25	C.C.W.	1.7"x5/16"	3.10	Triangular Brk/Box	Trane/Lincoln/Chromalox	4
R91189	1.6/8	115 208/230	1/20	CCW	1.65"x5/16"	3.15	3 ears	D1189, 41189	10
R219	1.60	115	1/20	C.W.	2.2"x5/16"	2.80	Cord & plug	Nutone	5
R220	1.60	115	1/20	C.C.W.	1.2"x5/16"	2.80	Cord & plug	Woods, Miami-Carey	5
R266	1.65	115	1/20	C.W.	1.4"x5/16"	2.80	Cord & plug	Reversomatic	5

3.3" Motors continued on next page.

Rotation determined opposite shaft end
Double shaft determined at lead end

Shaft length measured from hub
face to shaft end

www.rotom.ca