


For Commercial & Residential Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

LEAD FREE*
Braided Vinyl Tubing

Our Braided Vinyl Tubing is manufactured from Polyvinyl Chloride braided with Polyester.

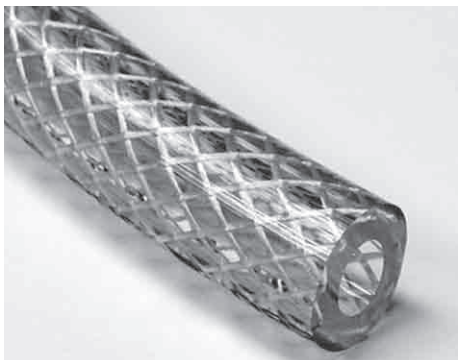

Attributes

- Smooth, dense bore maximizes flow and reduces sediment buildup
- Has four times the working pressure of single wall PVC.

Applications

- Chemical transfers
- Hydraulic lines
- Food and beverage lines
- Pneumatic lines
- Coolant lines
- Vacuum lines

Resistant to

Acids, alkalis, variety of chemical, gases and liquids

Operating Temperature Range . . . 125°F (52°C) to -40°F (-40°C)
 Material Polyester Reinforced PVC
 Color Clear
 Hardness Durometer 83+/-3 Shore A
 Toxicity Non-Toxic FDA Listed Material

Packaging

Coils, dispenser boxes, dispenser spools

Pressure Range

O.D. INCH	I.D. INCH	WALL	WORKING PRESSURE (PSI @ 70°F)
3/8	3/16	3/32	250
1/2	1/4	1/8	250
17/32	5/16	7/64	225
5/8	3/8	1/8	225
3/4	1/2	1/8	200
7/8	5/8	1/8	175
1	3/4	1/8	150
1-3/8	1	3/16	125
1-3/4	1-1/4	1/4	100
2	1-1/2	1/4	75
2-5/8	2	1/4	70

*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com
 Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca

A Watts Water Technologies Company