


Features

- 3 pole 20, 25, 30, 40, 50 & 60 amp
- Totally enclosed
- Features lug, spade terminals and protective covers
- Compact size
- Universal galvanized mounting plates
- ARI 780/790 standards
- Push to test button
- Brass/copper terminals
- Quick connect and screw terminals on coil.
- Snap on auxiliary contacts available
- cURus approved

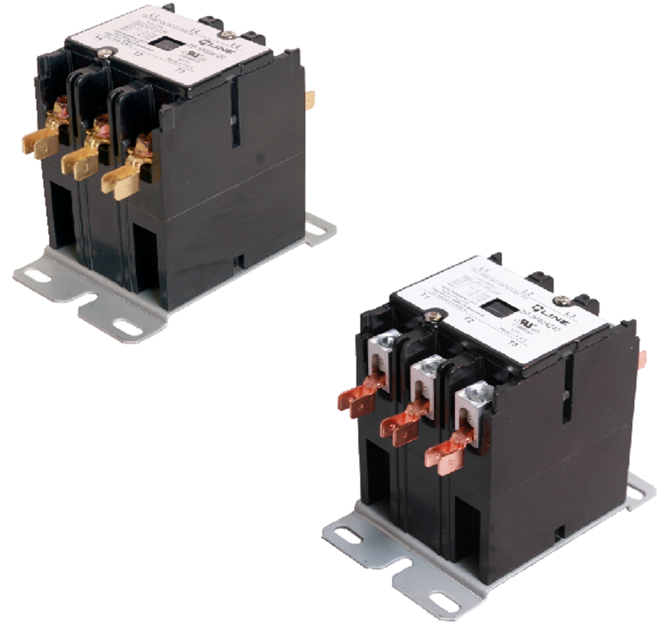

3 Pole Models

Part #	Poles	Full Load Amps.	Coil Voltage 50/60	Locked Rotor Amps			Resistive Amps.	Termination	Furnas #
				240V	480V	600V			
DP-3P20A24	3	20	24	120	100	80	30	Box Lug	-
DP-3P20A120	3	20	120	120	100	80	30		-
DP-3P20A240	3	20	208/240	120	100	80	30		-
DP-3P25A24	3	25	24	150	125	100	35	Box Lug	-
DP-3P25A120	3	25	120	150	125	100	35		-
DP-3P25A240	3	25	208/240	150	125	100	35		-
DP-3P30A24	3	30	24	180	150	120	40	Screw Type	42BF35AJ
DP-3P30A120	3	30	120	180	150	120	40		42BF35AF
DP-3P30A240	3	30	208/240	180	150	120	40		42BF35AG
DP-3P40A24	3	40	24	240	200	160	50	Box Lug	42CF35AJ
DP-3P40A120	3	40	120	240	200	160	50		42CF35AF
DP-3P40A240	3	40	208/240	240	200	160	50		42CF35AG
DP-3P50A24	3	50	24	300	250	200	65	Box Lug	42DF35AJ
DP-3P50A120	3	50	120	300	250	200	65		42DF35AF
DP-3P50A240	3	50	208/240	300	250	200	65		42DF35AG
DP-3P60A24	3	60	24	360	300	240	75	Box Lug	42EF35AJ
DP-3P60A120	3	60	120	360	300	240	75		42EF35AF
DP-3P60A240	3	60	208/240	360	300	240	75		42EF35AG
DP-3P75A24	3	75	24	450	375	300	90	Box Lug	42FE35AJ106
DP-3P75A120	3	75	120	450	375	300	90		42FE35AF106
DP-3P75A240	3	75	208/240	450	375	300	90		42FE35AG106
DP-3P90A24	3	90	24	540	450	360	120	Box Lug	42GE35AJ106
DP-3P90A120	3	90	120	540	450	360	120		42GE35AF106
DP-3P90A240	3	90	208/240	540	450	360	120		42GE35AG106