

# Instruction Sheet for Installing Condenser Fan Service Kit

**⚠ WARNING**



**Electrical Shock Hazard**

Disconnect power before servicing.  
Replace all parts and panels before operating.  
Failure to do so can result in death or electrical shock.

**Kit contains**

- 1 Fan Blade
- 2 Screws
- 1 Condenser Motor
- 1 Bracket
- 1 Instruction Sheet

1. Remove Top Grille. See *Figure 1*.

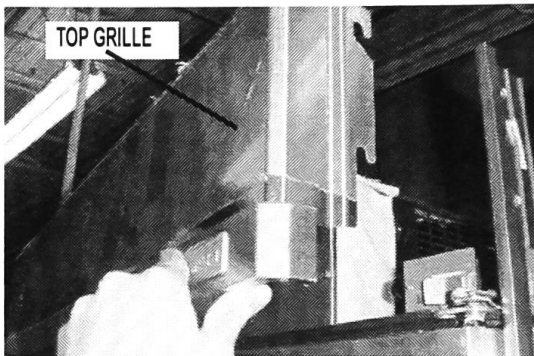


FIGURE 1

2. Turn off power. See *Figure 2*.

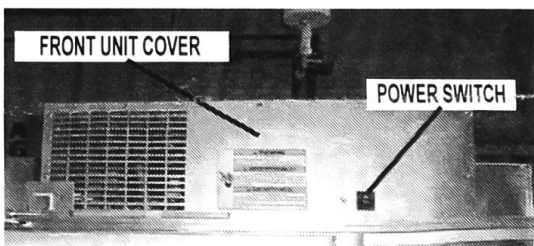


FIGURE 2

3. Remove Front Unit Cover. See *Figure 2*.

4. Remove and save the (3) Condenser Fan Assembly mounting screws. See *Figure 3*.

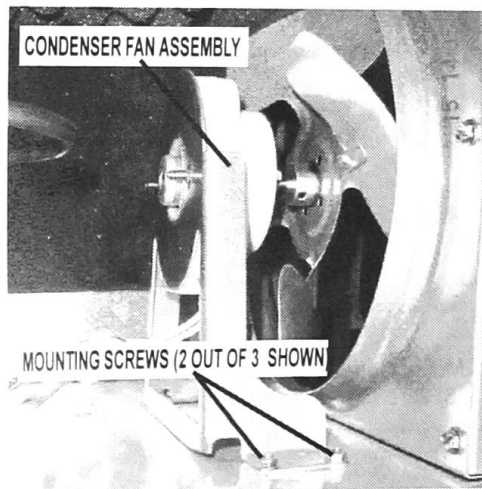


FIGURE 3

5. Disconnect Wire Harness Connector from Condenser Fan Assembly.

**NOTE:** Depress Wire Harness Connector locking tab to release. See *Figure 4*.

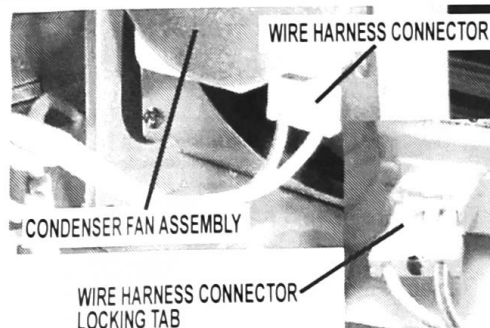


FIGURE 4

(continued on next page)

Instruction Sheet W10181322 Rev. A 2/08

6. Assemble Fan Blade and Condenser Motor that are provided in kit. Push fan blade on motor shaft until it stops and is secure. See *Figure 5*.

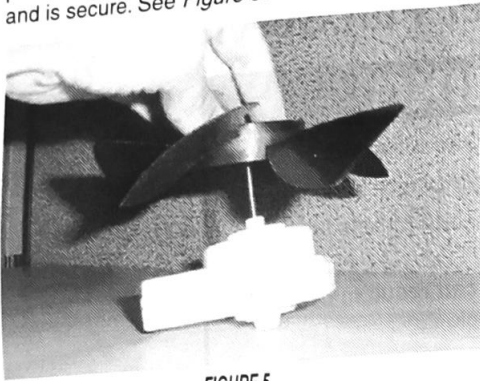


FIGURE 5

7. Attach new Condenser Motor and Fan Blade assembly to new Bracket with (2) screws provided in kit.
8. Attach Wire Harness to new Condenser Fan Assembly. See *Figure 6*.

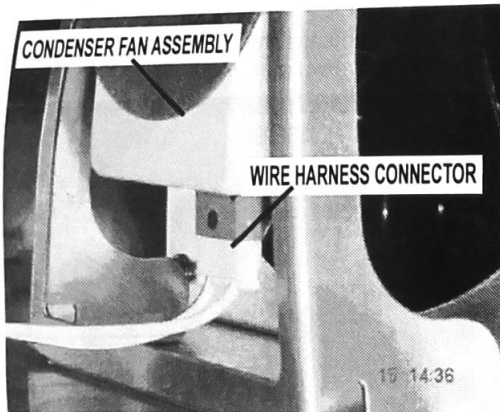


FIGURE 6

9. Mount Condenser Fan Assembly to refrigerator using (3) screws removed in step 4. See *Figure 7*.

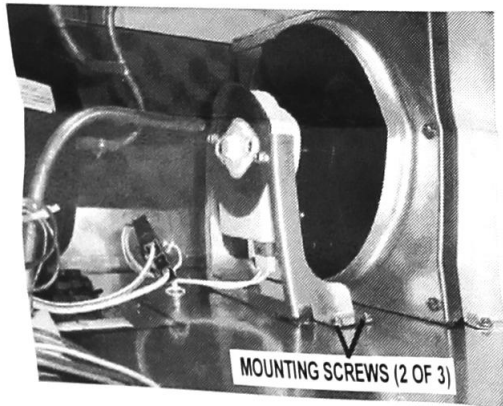


FIGURE 7

10. Turn on power. See *Figure 2*.
11. Verify the fan runs properly.
12. Replace Front Unit Cover.
13. Replace Top Grille.

# Fiche d'instructions

## Ventilateur du condenseur - Installation



### Contenu de l'ensemble

- 1 Hélice de ventilateur
- 2 Vis
- 1 Moteur du condenseur
- 1 Bride
- 1 Fiche d'instructions

1. Ôter la grille supérieure. Voir *Figure 1*.

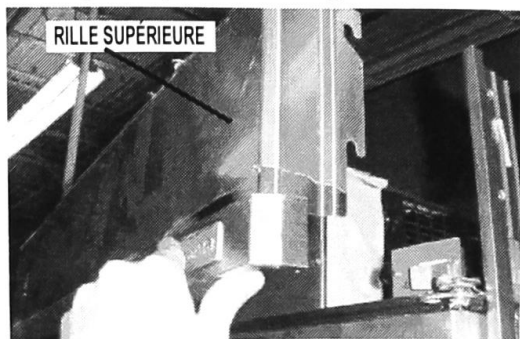


FIGURE 1

2. Commander l'arrêt de l'appareil. Voir *Figure 2*.

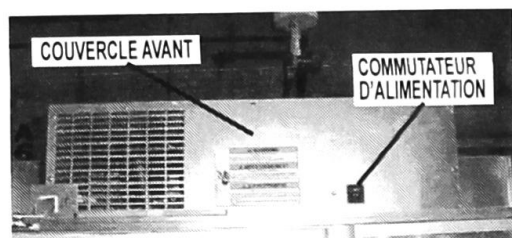


FIGURE 2

3. Ôter le couvercle avant. Voir *Figure 2*.

4. Ôter et conserver les 3 vis de montage du ventilateur. Voir *Figure 3*.

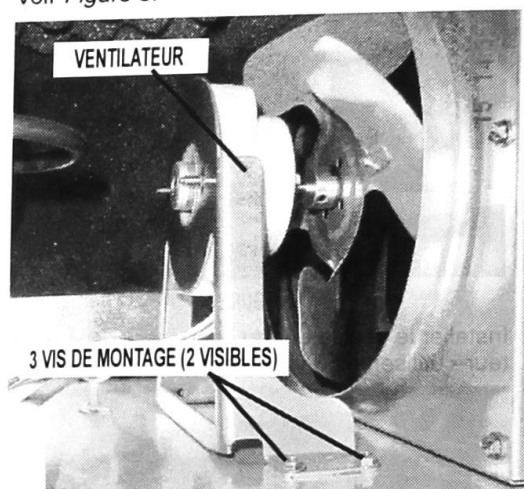


FIGURE 3

5. Débrancher le câblage du ventilateur du condenseur.

**REMARQUE:** Pour la libération du connecteur, appuyer sur la patte de blocage. Voir *Figure 4*.

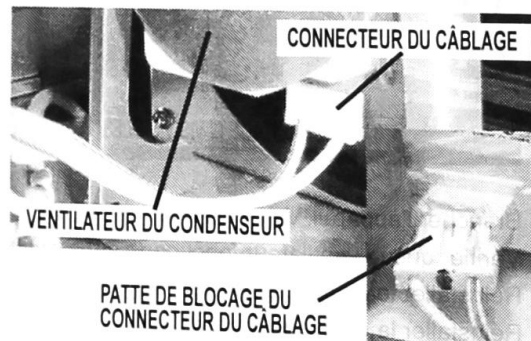


FIGURE 4

6. Installer l'ensemble hélice/moteur fourni avec l'ensemble. Enfoncer l'hélice sur l'axe du moteur jusqu'à la position de butée. Voir Figure 5.

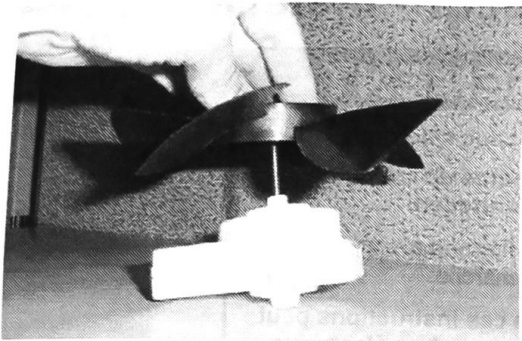


FIGURE 5

7. Installer le nouvel ensemble moteur/hélice sur la nouvelle bride, avec 2 vis fournies.
8. Brancher le câblage sur le nouveau ventilateur. Voir Figure 6.

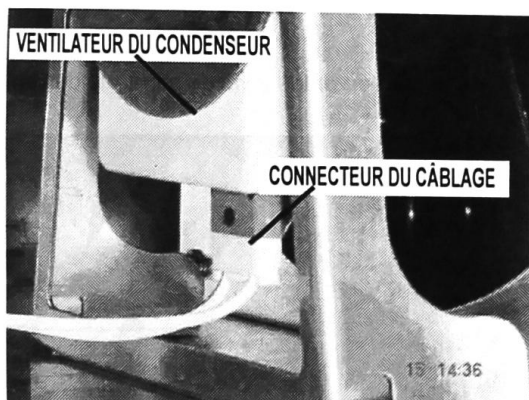


FIGURE 6

9. Installer le ventilateur du condenseur sur le réfrigérateur - utiliser les 3 vis ôtées à l'étape 4. Voir Figure 7.



FIGURE 7

10. Brancher l'appareil. Voir Figure 2.
11. Vérifier que le ventilateur fonctionne sans entrave.
12. Réinstaller le couvercle avant.
13. Réinstaller la grille supérieure.